


Rotary Vacuum Feedthrough

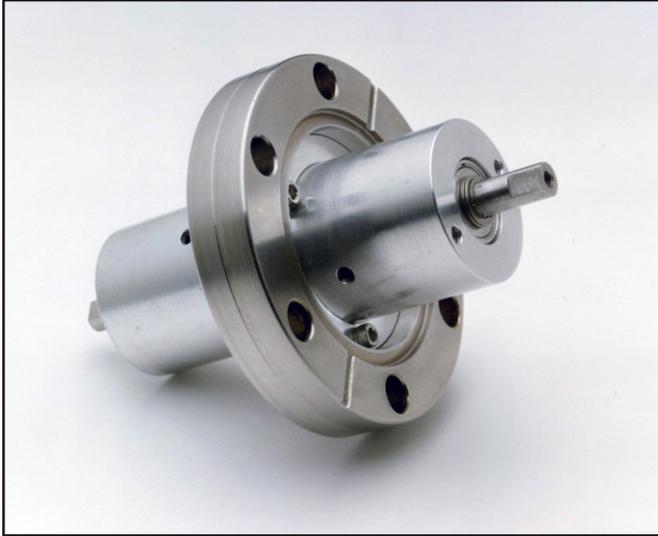

*NEC rotary vacuum feedthrough on
2.75" copper gasket compatible flanges.*

APPLICATIONS

The NEC magnetic coupled rotary feedthrough is ideal for applications requiring the transmission of high speed rotary motion into ultra-high vacuum environments.

This design has been in use in standard NEC components for well over a decade. These components are frequently operated 24 hours a day and have demonstrated a proven record of reliability.

This feedthrough mechanism is very similar to the rotary feedthrough used on the NEC beam profile monitor (BPM). The BPM uses the magnetically coupled rotary feedthrough to turn a wire through an ion beam. This is used to measure beam cross sectional shape. Its operation is continuous and customers report maintaining 10^{-10} Torr during operation.

DESIGN

The NEC rotary feedthrough consists of two magnets on opposite sides of a stainless steel plate. UHV compatible ball bearings supply support for a rotating shaft in the vacuum volume. There is no physical break across the vacuum barrier.

This magnetic coupling is designed to support a torque of 10 in.-oz. Both interior and exterior shafts are nominal .25" diameter, stainless steel. Various lengths and configurations are available.

For maximum life, it is recommended that the bakeout temperature not exceed 150°C. The bearings are replaceable and should last at least 2000 hours with a balanced load on the order of 100 grams. The maximum continuous rotation rating is 1200 rpm.

OPTIONS


As stated above, the NEC rotary vacuum feedthrough is available in a number of configurations. Other models are available which stop the rotating shaft at a pre-determined position when not in use and supply synchronizing signals for your applications.

The rotary feedthrough is available with NEC and standard copper seal flanges. Other flanges are available on request.

Rotary Vacuum Feedthrough

SPECIFICATIONS

Maximum RPM:	1200 continuous.
Life:	Load dependent; replaceable bearings should last at least 2000 hours with balanced 100 gram load.
Bearings:	Ball bearings; vacuum side are UHV compatible.
Bakeout:	150°C recommended maximum.
Torque:	10 in.-oz.
Shafts:	Stainless steel, nominal 1/4" diameter. Different lengths and end configurations available.
Flange:	2.75" O.D. NEC and 2.75" O.D. standard copper seal compatible flanges. Other flanges available on request.

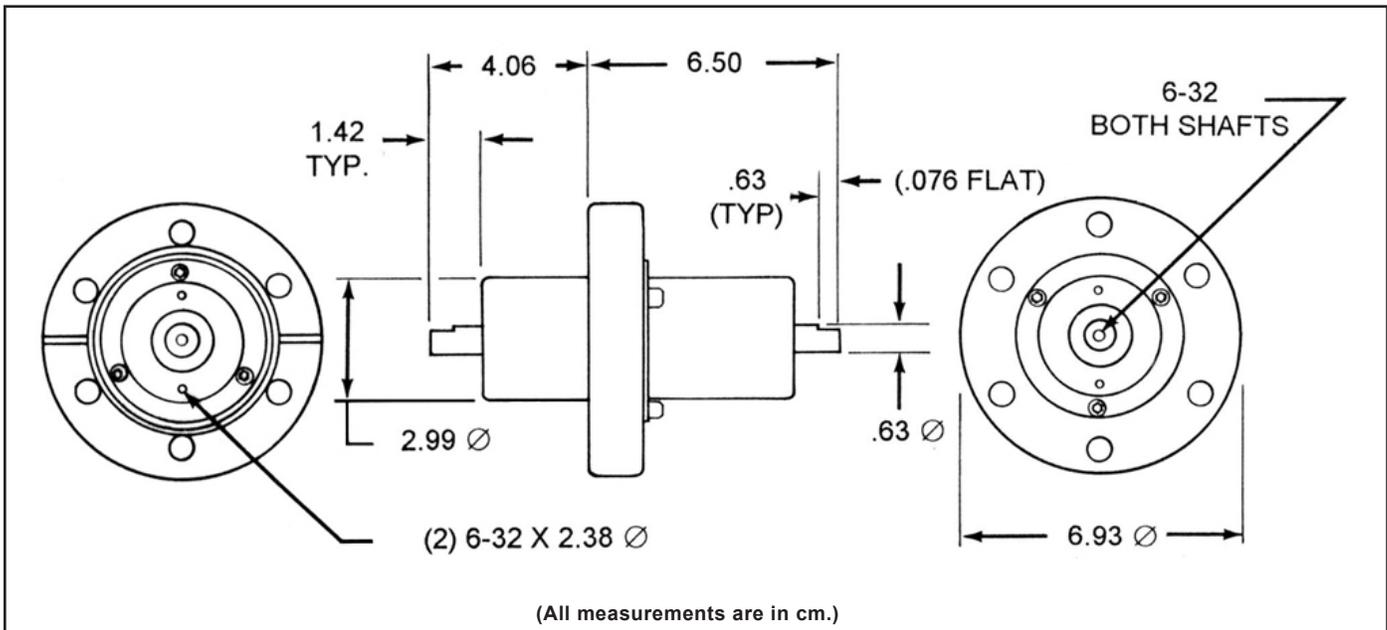

ORDERING INFORMATION

Catalog No. 2GA022160

Shipping weight: 5 lbs. (2.27kg)

F.O.B. Middleton, Wisconsin, U.S.A.

**National
NEC Electrostatics
Corp.**

[Rotary Feedthrough v1]

7540 Graber Rd., P.O. Box 620310, Middleton, WI 53562-0310 USA

TELEPHONE: 608-831-7600 ♦ FAX: 608-831-9591 ♦ E-MAIL: nec@pelletron.com ♦ WEB-SITE: <http://www.pelletron.com>